

TUBULAR WORM CONVEYOR



Sinfimasa

www.sinfimasa.com

30 Años
Años
Urte
Years
Ans
1986 - 2016

- "Industrial" type for transporting cement, abrasive substances, sand, plaster...

CHARACTERISTICS

- robust construction
- made of carbon, stainless and anti-wear steel
- lengths of 1 to 12 metres
- activated by the head or the foot
- diameters ranging from 3" ½ up to 24" (609mm)
- different types of seals
- SKF/INA bearings
- continuously laminated thread
- anti-wear thread

- Performances according to your needs
- Extracting or transporting function
- Made to measure size and shape available upon request



MACHINERY MANUFACTURERS
WITH CE MARKING IN COMPLIANCE
WITH MACHINERY DIRECTIVE
2006/42/CE



WORM CONVEYOR OVEN



WE MANUFACTURE TUBULAR WORM
CONVEYOR SUITABLE FOR WORKING IN
POTENTIALLY EXPLOSIVE ATMOSPHERES
(POWDER/GAS) WITH ATEX CERTIFICATES




ATEX TUBULAR WORM CONVEYOR



TILTED TUBULAR WORM



ATEX TUBULAR WORM

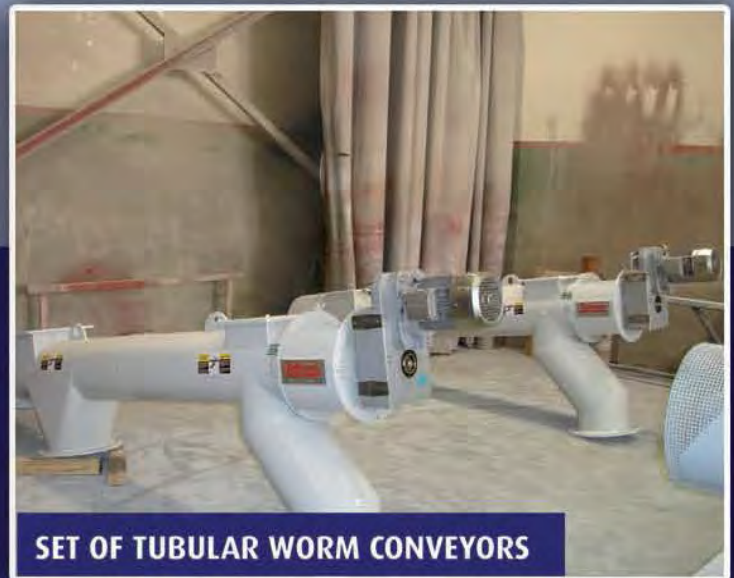

SET OF TUBULAR WORM CONVEYORS



FEEDER WORM CONVEYOR



VERTICAL WORM CONVEYOR



WORM CONVEYOR INSTALLATION FOR PLASTER



TUBULAR WORM



Sinfimasa

SINFINES Y MAQUINARIA S.A.

**Carrer del Tint, 25
25210 Guissona (Lleida)
Tel: 973 55 00 92
Fax: 973 55 01 75
www.sinfimasa.com**